

Eagle Eye Switch SFP Copper MMF Module



Application

- LAN 10/100/1000Base-T
- Gigabit Ethernet over Cat6/Cat6a Cable
- Switch to Switch Interface
- Router/Server Interface

Features

- Support 10/100/1000BASE-T Operation in Host Systems with SGMII interface
- Low power dissipation (1.05 W typical)
- Compact RJ-45 connector assembly
- Detailed product information in EEPROM
- 100m transmission over Cat6/Cat6a UTP Cable
- Access to Physical Layer IC via 2-Wire Serial Bus
- Commercial Temperature Range: 0~+70°C
- Hot-Pluggable SFP Footprint
- Fully metallic enclosure for low EMI

Description

The Copper Small Form Pluggable (SFP) modules are based on the SFP Multi Source Agreement (MSA). It is compliant with the Gigabit Ethernet and 1000BASE-T standards as specified in IEEE STD 802.3 and 802.3ab.

Product Specifications

I. General Specifications

Parameter	Symbol	Typ.	Min	Max	Units	Notes/Con ditions
Data rate		10		1000	Mbps	
Distance				100	m	Cat6/Cat6a UTP. BER <10 ⁻¹²

II. Absolute Maximum Ratings

Parameter	Symbol	Min	Typ.	Max	Unit
Maximum Supply Voltage	V _{cc}	-0.5		4.0	V
Storage Temperature	T _s	-40		85	°C

III. Electrical Characteristics

Parameter	Symbol	Typ.	Min	Max	Unit	Notes/Conditio ns
+3.3 Volt Electrical Power Interface						
Supply Current	I _{cc}		300	350	mA	
Input Voltage	V _{cc}	3.15	3.3	3.45	V	
Surge Current	I _{surge}			30	mA	

Low-Speed Signals, Electronic Characteristics

SFP Output LOW	V_{OL}	0		0.5	V	4.7k to 10k pull-up to host_Vcc, measured at host side of connector
SFP Output HIGH	V_{OH}	host – Vcc – 0.5		host_Vcc + 0.3	V	4.7k to 10k pull-up to host_Vcc, measured at host side of connector
SFP Input LOW	V_{IL}	0		0.8	V	4.7k to 10k pull-up to Vcc, measured at SFP side of connector
SFP Input HIGH	V_{IH}	2		Vcc + 0.3	V	4.7k to 10k pull-up to Vcc, measured at SFP side of connector


High-Speed Electrical Interface, Transmission Line-SFP

Line Frequency	fL		1250		MHz	5-level encoding, per IEEE 802.3
Tx Output impedance	$Z_{out,TX}$		100		Ohm	Differential, for all frequencies between 1MHz and 125MHz
Rx Input Impedance	$Z_{in,RX}$		100		Ohm	Differential, for all frequencies between 1MHz and 125MHz

High-Speed Electrical Interface, Host-SFP

Single ended data input swing	V_{in}	250		1200	mV	Single ended
Single ended dataoutput swing	V_{out}	350		800	mV	Single ended
Rise/Fall Time	T_r, T_f		175		psec	20%-80%
Tx Input Impedance	Z_{in}		50		Ohm	Single ended
Rx Output Impedance	Z_{out}		50		Ohm	Single ended

IV. Pin Description

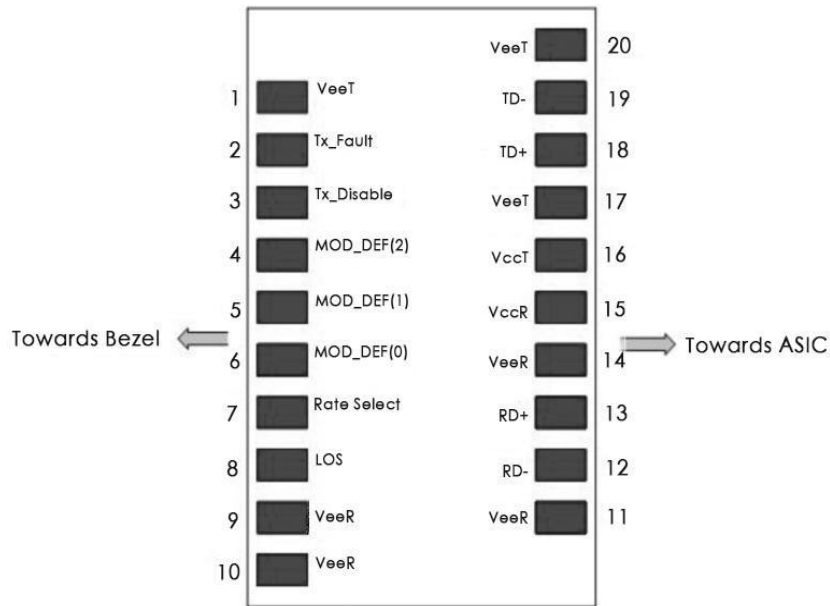


Pin No.	Name	Function	Plug Seq.	Notes
1	VeeT	Transmitter Ground	1	
2	TX Fault	Transmitter Fault Indication	3	Not used
3	TX Disable	Transmitter Disable	3	Note 1
4	MOD-DEF2	Module Definition 2	3	Note 2
5	MOD-DEF1	Module Definition 1	3	Note 2
6	MOD-DEF0	Module Definition 0	3	Note 2
7	Rate Select	Not Connected	3	
8	LOS	Loss of Signal	3	RX_LOSS
9	VeeR	Receiver Ground	1	

10	VeeR	Receiver Ground	1	
11	VeeR	Receiver Ground	1	
12	RD-	Inv. Received Data Out	3	
13	RD+	Received Data Out	3	
14	VeeR	Receiver Ground	1	
15	VccR	Receiver Power	2	
16	VccT	Transmitter Power	2	
17	VeeT	Transmitter Ground	1	
18	TD+	Transmit Data In	3	
19	TD-	Inv. Transmit Data In	3	
20	VeeT	Transmitter Ground	1	

Notes:

1. PHY disabled on TDIS > 2.0V or open, enabled on TDIS < 0.8V, used to reset the module.
2. Should be pulled up with 4.7k – 10k Ohm on host board to a voltage between 2.0 V and 3.6 V. MOD_DEF (0) pulls line low to indicate module is plugged in.

V. Mechanical Specifications

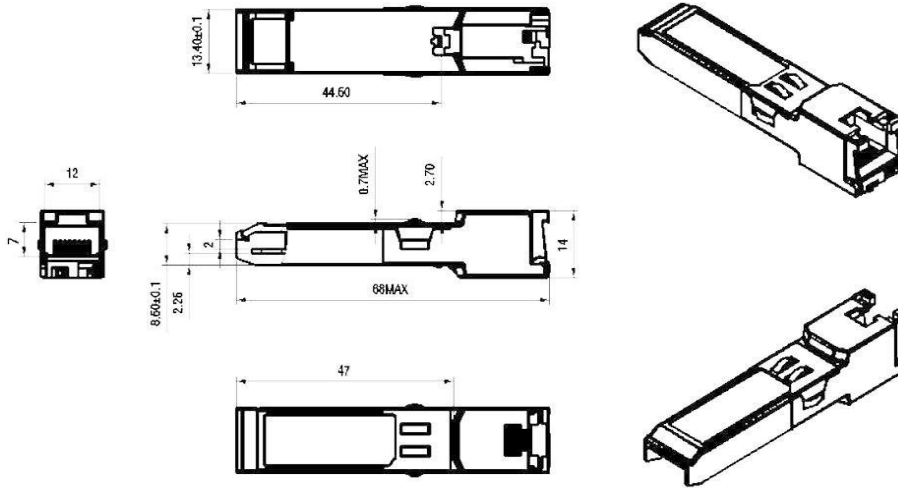

Copper SFP transceivers are compliant with the dimensions defined by the SFP Multi-Sourcing Agreement (MSA).

DRIVER
TECHNOLOGY

Driver Technology
(601) 497-3450
<https://drivertechnology.alibidealer.com>