ALIBI®

**VIGILANT FLEX SERIES**

NDAA PRODUCT TECHNICAL REQUIREMENTS

*Meets federal government technical requirements*

# ALIBI VIGILANT FLEX SERIES 2MP STARLIGHT HD-TVI/AHD/ CVI/CVBS VANDAL RESISTANT FIXED DOME CAMERA

### Key Features:

+ 2MP Resolution Dome Camera
+ 4-in-1 Video Output: HD-TVI/ AHD/TVI/CVI: 2M@30fps
+ 2.8mm fixed lens
+ Starlight chipset (.001 lux) for color in low light
+ 100 feet IR range
+ NDAA compliant
+ DWDR (Digital Wide Dynamic Range)
+ DNR (Digital Noise Reduction)
+ IP67 rating handles extreme temperatures
+ IK10 housing design for secure installs

### What's Included

+ 2MP Starlight fixed lens dome camera
+ Mounting template
+ Mounting hardware
+ Quick start guide

As part of the Alibi Vigilant Flex Series, this security camera delivers crisp video day or night, providing HD-TVI/AHD/CVI/CVBS output for maximum compatibility. This product has been specifically designed and manufactured to comply with the latest technical requirements specified under NDAA regulations.

**Up the Coax (UTC) technology** grants you control over the camera's onscreen display (OSD) from your web browser and the Alibi CMS or smartphone app.

**Multi-megapixel resolution** – Get more detail from your video camera. This camera captures high-resolution video footage that delivers crisp, precise detail and clarity for your video security needs.

**3D Digital Noise Reduction (DNR)** effectively filters noise to produce a crisper, clear video stream.

**IP67 weatherproof housing** – this camera can handle long-term durability even among extreme weather conditions such as rain, snow, and ice.

**Full Frame Illumination with Smart IR** Smart full-frame illumination technology offers several advantages over standard IR for flawless night vision, including:

- Clearer, brighter images in low light and at night
- Reduces overexposure of the IR LEDs at the center of the image
- Increases illuminant efficiency up to 30%
- Produces LED light in rectangle form to better fit screen size
- Captures images without washing out the subject at closer ranges
- Reduces video noise for a clearer nighttime picture and reduces bandwidth consumption and video storage requirements

**Innovative Day/Night Scene Detection** – includes a hardware sensor for smart software imaging that detects surveillance scene illumination. Designed to be water and dust-proof, this allows you to avoid unexpected costs of hardware failure.

**Intuitive interface** – everything you need to manage your system at your fingertips. With an intuitive interface and access to the free Alibi CMS and mobile app, system management has never been simpler.

1st Choice Security & Investigations
TEXLIC: C16306

**1st Choice Security**
512-215-4377
http://1stchoicesecurity.alibidealer.com

# SPECIFICATIONS

### CAMERA

| | |
|---|---|
| Image Sensor | 1 / 2.8 "CMOS |
| Resolution | 2MP |
| Image Size | 1920 x 1080 |
| Video Output | AHD/TVI/CVI/CVBS |
| Image System | PAL/NTSC |
| Electronic Shutter | Auto; 1/25s-1/50000s(PAL); 1/30s-1/50000s(PAL) |
| IR Distance | 20-30 m |
| Frame Rate | 30fps(60Hz); 25fps(50Hz) |
| Min. Illumination | Color : 0.001 lux@F1.2, AGC ON; B/W : 0 lux with IR |
| Lens | 2.8-12 mm, motorized |
| Field of View | 85°- 34° |
| Lens Mount | D14 |
| S / N Ratio | ≥52dB ( AGC OFF ) |
| Ingress Protection | IP67 & IK10 |

### FUNCTIONS

| | |
|---|---|
| Function Control | OSD ( COC Control ) |
| Day & Night | ICR |
| WDR | Yes (120dB) |
| 3D NR | Yes |
| Global Exposure | No |
| Central Exposure | No |
| AGC | Yes |
| Auto White Balance | Yes |
| BLC | Yes |
| LSC | Yes |
| HLC | Yes |
| Freeze | Yes |
| Mirror | Yes |
| Defog | No |
| Sharpness | Yes |
| Smart IR | Yes |
| Motion Detection | Yes |
| Privacy Mask | Yes |
| Defect Correction | Auto |
| Language | 16 languages |
| Angle Adjustment | Pan: 0°~345°; Tilt: 0°~77°; Rotation: 0°~345° |

### OTHERS

| | |
|---|---|
| Power Supply | DC12V ( ± 15% ) |
| Power Consumption | IR OFF : < 1.5W; IR ON : < 5W |
| Working Environment | - 30 °C ~ 50 °C, 10 % ~ 90 % (relative humidity) |
| Dimensions ( mm ) | Dia. 141 x 100.2 |
| Weight ( net ) | Approx. 0.82KG |

# DIMENSIONS

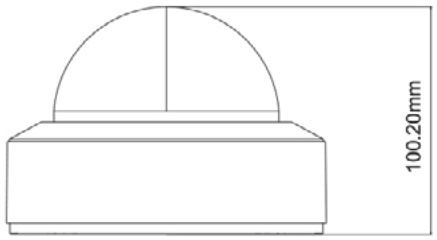


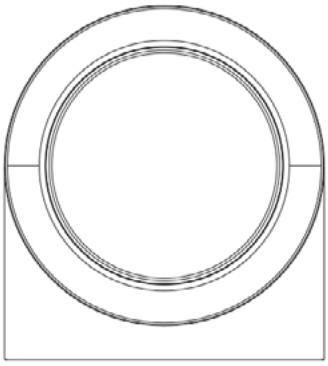


# BRACKETS

Junction Box For Varifocal Dome Cameras

1st Choice Security & Investigations
TEXLIC: C16305

**1st Choice Security**
512-215-4377
http://1stchoicesecurity.alibidealer.com