



VIGILANT PERFORMANCE SERIES



ALIBI VIGILANT PERFORMANCE 5MP STARLIGHT SMARTSENSE INTELLISEARCH IP VARIFOCAL BULLET CAMERA

Key Specifications:

- + 5MP high-resolution 2880 x 1620 @ 30fps
- + 2.7-13.5mm autofocusing and motorized Lens
- + Smart IR up to 196 feet nighttime viewing
- + Color Attribute Collection
- + IntelliSearch™ Color Match Technology
- + Starlight technology - Color: 0.002Lux, 0 Lux with IR
- + Up to 130dB true WDR (Wide Dynamic Range)
- + Built-in Mic and Audio-Alarm 1 in/1 out
- + MicroSD, up to 256GB
- + ANR Network Storage, NAS (NFS)
- + Supports Ultra 265, H.265, H.264, and MJPEG
- + ONVIF (Profile S, Profile G, Profile T), API, SDK
- + Meets NDA federal government compliance requirements

The Alibi Vigilant Performance Series, 5MP 196 feet IR Varifocal Bullet Camera delivers crisp video day or night. It also offers flexible storage solutions, with a built-in micro-SD slot - enabling local storage up to 256GB.

- + **Multi-Megapixel Resolution Video** - 5MP resolution provides exceptional clarity and detail for most applications.
- + **Smart Full-Frame IR = Better Video at Night** - Advanced full-frame illumination technology helps you capture up to 196 feet of nighttime video footage with more contrast and clarity.
- + **Color Attribute Collection** - Advanced technology collects the color information of the target with high accuracy for identification of a human's upper and lower garment, color of a vehicle, and upper garment color of the driver of a non-motor vehicle.
- + **Auto Scene Adjustment (intelligent WDR)** - Allows camera to easily and quickly improve image quality in high-contrast lighting conditions (foggy, backlit, flickering) and capture details in both areas of the video that are dimly and brightly lit.
- + **SmartSense technology** - utilizes AI deep learning developed data algorithms to identify human and vehicular targets with extreme accuracy and reduce false alarms.
- + **Starlight 2.0 Chipset Technology** - featuring an HD progressive scan CMOS sensor, capturing clear and vivid color images day or night - even in extremely dark environments.
- + **Lower Bandwidth and Storage Usage** - Ultra H.265 Compression technology reduces the video stream's overall requirements, saving you bandwidth and hard drive space.
- + **Easy management** - an intuitive interface and access to the free Vigilant Mobile App and Vigilant CMS makes management more straightforward than ever.



ACCESS CONTROL CONNECTION
ACCESS CONTROL CONNECTION

Access Control Connection

831-402-9411

<http://www.commercialsurveillancesystems.com>

SPECIFICATIONS

CAMERA

Max Resolution	5 MP
Sensor	1/2.7" CMOS
Min. Illumination	Colour: 0.002 lux (F1.2, AGC ON) 0 lux with IR on
Day/Night	IR-cut filter with auto switch (ICR)
Shutter	Auto/Manual, 1 - 1/100000s
Adjustment Angle	Pan: 0° - 360°, Tilt: 0° - 90°, Rotate: 0° - 360°
S/N	>56dB
WDR	130dB

LENS

Focal Length	2.7 - 13.5 mm
Iris Type	Fixed
Iris	F1.2
Field of View (H)	106.3°- 32.5°
Field of View (V)	53.5°- 18.0°
Field of View (D)	126.0°- 38.5°
Lens Type	Motorized

DORI

DORI Distance (Lens)	2.7mm, 13.5mm
DORI Distance (Detect)	60.8m(199ft), 303.8m(996.7ft)
DORI Distance (Observe)	24.3m(79.7ft), 121.5m(398.6ft)
DORI Distance (Recognize)	12.2m(40ft), 60.8m(199.5ft)
DORI Distance (Identify)	6.1m(20ft), 30.4m(99.7ft)

VIDEO

Video Compression	Ultra 265, H.265, H.264, MJPEG
H.264 code profile	Baseline profile, Main profile, High profile
Frame Rate	Main Stream:5MP (2880*1620), Max 30fps; 4MP (2560*1440), Max 30fps; 3MP (2304*1296), Max 30fps; 1080P (1920*1080), Max 30fps; Sub Stream: 1080P (1920*1080), Max 30fps; 720P (1280*720), Max 30fps; D1 (720*576), Max 30fps; 640*360,Max 30fps; 2CIF(704*288), Max 30fps; CIF(352*288), Max 30fps; Third Stream: D1 (720*576), Max 30fps; 640*360,Max 30fps; 2CIF(704*288), Max 30fps; CIF(352*288), Max 30fps
Video Bit Rate	128 Kbps-16 Mbps
U-code	Support
OSD	Up to 8 OSDs
Privacy Mask	Up to 4 areas
ROI	Support
Video Stream	Triple streams

ILLUMINATOR

Supplemental Light	IR
Illumination Distance (IR)	60 m (196.9 ft)
IR On/Off Control	Auto/Manual
Wavelength	850 nm

IMAGE

Auto Scene Match (ASM)	Support (Only WDR)
White Balance	Auto, Outdoor, Fine Tune, Sodium Lamp, Locked, Auto2
Digital Noise Reduction	2D/3D DNR
Smart IR	Support
Flip	Normal/Vertical/Horizontal/180°/90° Clockwise/90° Anti-clockwise
Dewarping	N/A
HLC	Support
BLC	Support
Defog	Digital Defog

INTELLIGENT

Smart Intrusion Prevention	Cross line detection, Intrusion detection, Enter area detection, Leave area detection (support false alarm filtering and the classification of human, non-motor vehicle and vehicle)
Statistical Analysis	N/A
People Counting	Support People Flow Counting and Crowd Density Monitoring
Attribute Collection	SIP with color retrieval

EVENTS

Basic Detection	Motion Detection, Ultra Motion Detection, Tampering Alarm, Audio Detection
General Function	Watermark, IP Address Filtering, Access Policy, ARP Protection, RTSP Authentication, User Authentication, HTTP Authentication, Alarm Input, Alarm Output

AUDIO

Audio Compression	G.711U, G.711A
Audio Bitrate	64 Kbps
Two-way Audio	Support
Suppression	Support
Sampling Rate	8KHZ

STORAGE

Edge Storage	Micro SD, up to 512 GB
Network Storage	ANR, NAS(NFS)



ACCESS CONTROL CONNECTION

Access Control Connection

831-402-9411

<http://www.commercialsurveillancesystems.com>

SPECIFICATIONS

NETWORK

Protocols	IPv4, IPv6, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, RTMP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, 802.1x, SNMP, QoS, SSL/TLS, SSH
Compatible Integration	ONVIF (Profile S, Profile G, Profile T), API, SDK
User/Host	Up to 32 users. 3 user levels: administrator, common user and operator
Security	Password Protection, Strong Password, HTTPS Encryption, Export Operation Logs, Basic and Digest Authentication for RTSP, Digest Authentication for HTTP, TLS 1.2, WSSE and Digest Authentication for ONVIF
Client	Alibi Vigilant CMS Alibi Vigilant Toolbox Alibi Vigilant Mobile
Web Browser	Plug-in required live view: IE 10 and above, Chrome 45 and above, Firefox 52 and above, Edge 79 and above, Plug-in free live view: Chrome 57.0 and above, Firefox 58.0 and above, Edge 16 and above

INTERFACE

Audio I/O	1 Input: impedance 35 kΩ, amplitude 2 V [p-p], 1 Output: impedance 600 Ω, amplitude 2 V [p-p]
Alarm I/O	1/1
Serial Port	N/A
Built-in Mic	Support
Built-in Speaker	N/A
WIFI	N/A
Network	1 x RJ45 10M/100M Base-TX Ethernet
Video Output	N/A

CERTIFICATIONS

EMC	CE-EMC (EN 55032, EN 61000-3-3, EN IEC 61000-3-2, EN 50130) FCC (FCC 47 CFR part15 B)
Safety	CE-LVD (EN 62368-1) CB (IEC 62368-1) UL/CUL (UL 62368-1, CAN/CSA C22.2 No. 62368-1)
Environment	CE-RoHS (2011/65/EU;(EU)2015/863); WEEE (2012/19/EU)
Protection	IP67 (IEC 60529) IK10 (IEC 62262)

GENERAL

Power	DC 12V±25%, PoE (IEEE 802.3af)
Power Consumption	Max 9.5W
Power Interface	Ø 5.5 mm coaxial power plug
Dimensions	324 × 126 × 130mm (12.8" × 5.0" × 5.1") (L x W x H)
Weight	1.48kg (3.26lb)
Material	Metal + Plastic
Working Environment	-30 °C - 60 °C (-22 °F - 140 °F), Humidity: ≤95% RH (non-condensing)
Storage Environment	-30 °C - 60 °C (-22 °F - 140 °F), Humidity: ≤95% RH (non-condensing)
Surge Protection	6 KV
Reset Button	Support
Web Client Language	20 Languages Traditional Chinese, English, Simplified Chinese, Polish, German, Russian, French, Korean, Dutch, Czech, Portuguese (Europe), Portuguese (Brazil), Japanese, Thai, Turkish, Spanish (Latin America), Spanish (Europe), Hungarian, Italian, Vietnamese

COMPATIBLE BRACKETS



Bullet & Dome Corner Mounting Bracket



Pole Mount Adapter for Bullet Cameras








ACCESS CONTROL CONNECTION

Access Control Connection

831-402-9411

<http://www.commercialsurveillancesystems.com>

DIMENSIONS

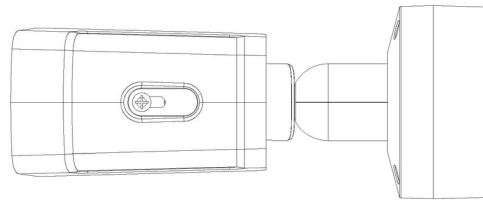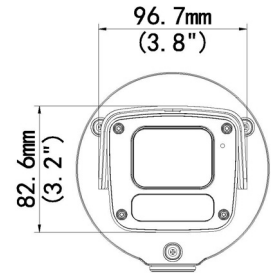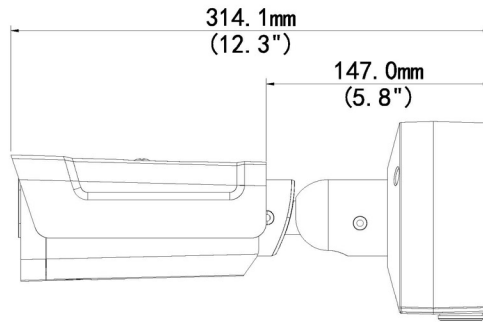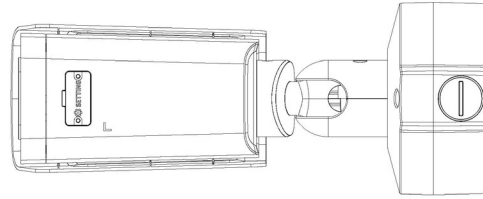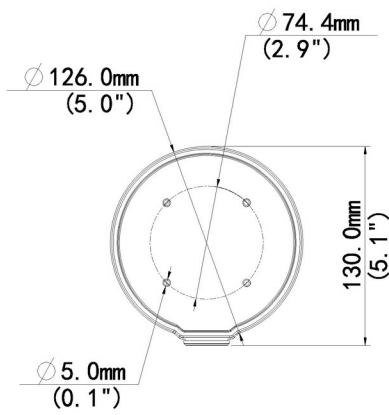

ACCESS CONTROL CONNECTION

<http://www.commercialsurveillancesystems.com>

Access Control Connection

831-402-9411