



VIGILANT FLEX SERIES



ALIBI VIGILANT FLEX SERIES 4MP IP FIXED BULLET NETWORK CAMERA

Key Specifications:

- + 4MP IP bullet camera
- + 2.8mm lens
- + 97.0 degrees Field of View
- + DORI Distance: Detect 63.0m, Observe 25.2m, Recognize 12.6m, Identify 6.3m
- + 98 feet Smart IR Distance
- + 0.02 low-light Lux rating
- + Built-In Microphone
- + Supports Ultra H.265, H.265, H.264, MJPEG
- + DWDR (Digital Wide Dynamic Range)
- + Supports up to 128GB Micro SD-Card
- + NDA compliant
- + IP67 rating - withstands temps from -22 degrees to 140 degrees Fahrenheit

The Alibi Vigilant Flex Series 4MP Bullet Security Camera delivers crisp video day or night.

This product has been specifically designed and manufactured to comply with the latest technical requirements specified under NDAA regulations.

- + **Multi-Megapixel Resolution Video** - 4MP camera captures a high level of clarity and detail for most applications
- + **3D Digital Noise Reduction (DNR)** effectively filters noise to produce a crisper, clear video stream.
- + **IP67 weatherproof housing** this bullet camera has a wide temperature range of -22 degrees to 140 degrees Fahrenheit- delivering long-term durability even among extreme weather conditions such as rain, snow, and ice.



Precision Security Specialist
3306070265
<http://PSS.alibidealer.com>

SPECIFICATIONS

CAMERA

Sensor	1/3", progressive scan, CMOS	
Shutter	Auto/Manual, 1 - 1/100000s	
Minimum Illumination	Colour: 0.02Lux (F2.1 , AGC) 0Lux with IR on	
Digital noise reduction	2D/3D DNR	
Day/Night	IR-cut filter with auto switch (ICR)	
S/N	>52dB	
IR Range	Up to 30m (98ft) IR range	
Defog	Digital Defog	
WDR	DWDR	
Adjustment angle	Pan: 0° - 360° Tilt: 0° - 90° Rotate: 0° - 360°	
Angle of View (H)	97.0°	79.0°
Angle of View (V)	52.2°	42.3°
Angle of View (O)	107.5°	85.1°

LENS

Lens	2.8mm@F2.1	4.0mm@F2.1
------	------------	------------

DORI

Lens (mm)	2.8	4.0
Detect (m)	63.0	90.0
Observe (m)	25.2	36.0
Recognize (m)	12.6	18.0
Identify (m)	6.3	9.0

AUDIO

Audio Compression	G.711
Suppression	Supported
Sampling Rate	8KHZ

VIDEO

Video Compression	Ultra 265, H.265, H.264
H.264 code profile	Baseline profile, Main profile, High profile
Frame Rate	Main Stream: 4MP (2560*1440), Max 20fps; 3MP (2304*1296), Max 20fps; 1080P (1920*1080), Max 30fps; Sub Stream: 720P (1280*720), Max 30fps; D1 (720*576), Max 30fps; 640*360, Max 30fps; 2CIF(704*288), Max 30fps; CIF(352*288), Max 30fps;
HLC	Supported
BLC	Supported
OSD	Up to 4 OSDs
Privacy Mask	Up to 4 areas
ROI	Up to 8 areas
Motion Detection	Up to 4 areas

NETWORK

Protocols	IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, SSL, QoS, RTMP
Compatible Integration	ONVIF (Profile S, Profile T), API

INTERFACE

Network	10/100M Base-TX Ethernet
Built-in Mic	Supported

GENERAL

Power	DC 12V±25%, PoE Power consumption: Max 3.5W
Dimensions (L × W × H)	144 × 60 × 65mm (5.6" × 2.4" × 2.6")
Weight	0.17kg (0.37lb)
Working Environment	-30°C - 60°C (-22°F - 140°F), Humidity: ≤95% RH (non-condensing)
Surge Protection	4KV
Ingress Protection	IP67
Reset Button	N/A



Precision Security Specialist

3306070265

<http://PSS.alibidealer.com>

COMPATIBLE BRACKETS



Junction Box
Waterproof Joint



Junction Box For Mini Bullet
Cameras



3in Electric-box Transfer Plate for
Fixed Lens Camera



3in Electric-box Transfer Plate
for Fixed Lens Camera (wide
base)



Bullet & Dome Corner Mounting
Bracket




Pole Mount Adapter for Bullet
Cameras



Pole Mount Adapter for Bullet
Cameras

DIMENSIONS

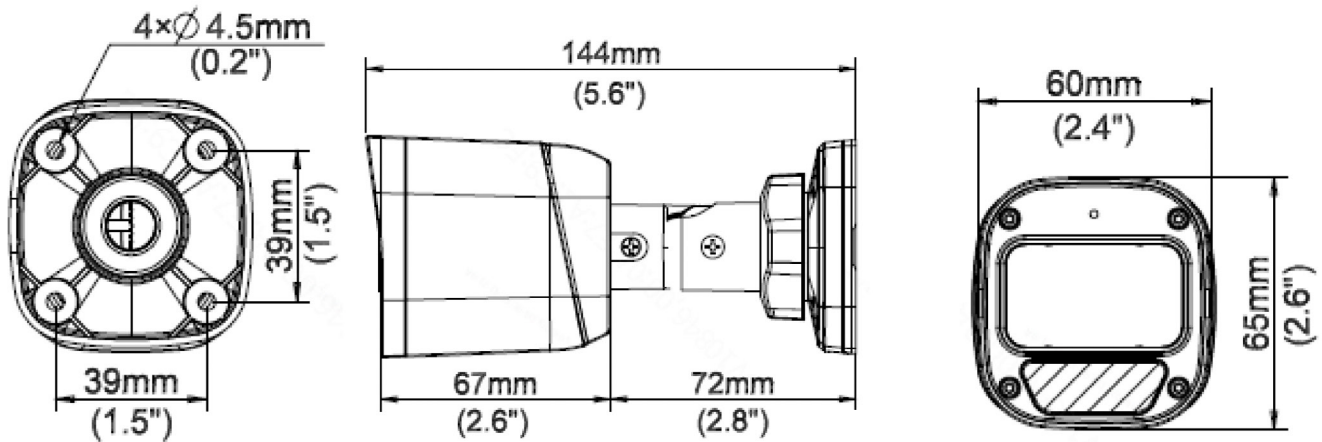

Precision Security Specialist

3306070265

<http://PSS.alibidealer.com>