




VIGILANT FLEX SERIES

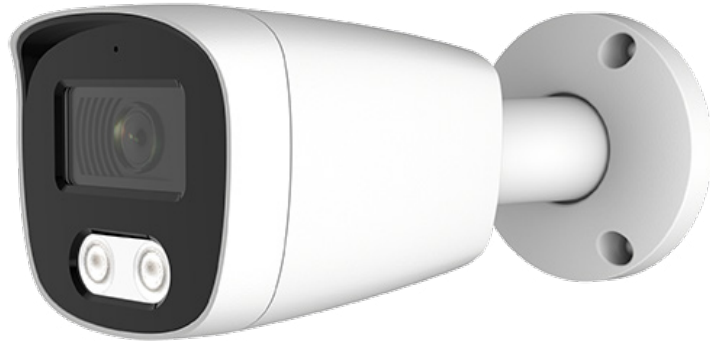

Meets federal government technical requirements

ALIBI VIGILANT FLEX SERIES 2MP ILLUMINITE STARLIGHT HD-TVI/AHD/CVI/CVBS FIXED BULLET CAMERA

Key Specifications:

- + 2MP Bullet Camera
- + SONY Starvis chipset for color in low light
- + Built-in White Light LED to capture color video 24/7
- + 2.8mm fixed lens
- + NDA A compliant
- + Video Output: HD-TVI/AHD/TVI/CVI: 2M@30fps
- + DWDR (Digital Wide Dynamic Range)
- + DNR (Digital Noise Reduction)
- + IP67 rating- withstands temps from 14 degrees to 140 degrees Fahrenheit
- + **Built-in LED for Color Video 24/7/365** - The powerful white light LED that is built-in just below the lens helps illuminate the field of view so you can capture color video all day and all night. The LED also can act as a deterrent during the night.
- + **Multi-megapixel resolution** - Get more detail from your video camera. This camera captures high-resolution video footage that delivers crisp, precise detail and clarity for your video security needs.
- + **Innovative Day/Night Scene Detection** - includes a hardware sensor for smart software imaging that detects surveillance scene illumination. Designed to be water and dust-proof, this allows you to avoid unexpected costs of hardware failure.
- + **Intuitive interface** - everything you need to manage your system at your fingertips. With an intuitive interface and access to the free Alibi CMS and mobile app, system management has never been simpler.



**PREMIER
SURVEILLANCE**

Premier Surveillance

432-239-4406

<https://www.premiersurveillancetx.com/>

SPECIFICATIONS

CAMERA

Image Sensor	1/2.8" SONY Starvis Back-illuminated CMOS sensor
Image Resolution	5M:2592*1944 4M:2560*1440 2M:1920*1080
TV System	PAL/NTSC
Electronic Shutter	Auto
Scanning System	Progressive Scan

LENS

Focus Length	2.8mm
Field of View	107°
Focus Control	Fixed
Lens Type	Fixed

NIGHT VISION

IR Cut Filter	YES
Infrared LED	NO, Support Warm white (4000K)
Light Distanc	up to 25m
IR Status	AGC Auto Control

CAMERA FEATURES

Starlight	YES
Day/Night	Color
OSD Menu	YES
WDR	YES
UTC	YES
Noise Reduction	AI-DNR
Coaxial Audio	/
White Balance	AUTO / MANUAL
Gain Control	AUTO

STORAGE

Housing	Metal, IP67
Bracket	YES
Operation Temperature	-30°+50° RH95% Max
Storage Temperature	-20° - +60° RH95% Max
Power Source	DC12V±10%, 450mA
Dimension	2.76" W x 2.66" H x 6.66" L (70(W) x 67.5(H) x 169(L)mm)
Weight	1.3 lbs (600g)

BRACKETS



Junction Box

